

PRVPATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

REC'D 06 SEP 2000

**Intyg
Certificate**

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande TPS Termiska Processer AB, Nyköping SE
Applicant (s)

(21) Patentansökningsnummer 9902711-2
Patent application number

(86) Ingivningsdatum 1999-07-15
Date of filing

Stockholm, 2000-08-18

För Patent- och registreringsverket
For the Patent- and Registration Office

Anita Södervall
Anita Södervall

Avgift
Fee

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

PARTICLE SEPARATOR

Technical field of the Invention

The present invention relates to a method for separating entrained particles from a gas in a fluidised bed reactor system and a fluidised bed reactor system including a particle separator for separating entrained particles from a gas.

Background art

10 In the fields of pyrolysis, gasification and combustion, it is common to provide the reactor of a boiler or a combustion apparatus with a bed of particles, which, among other advantages, greatly enhances heat transfer because of the high heat carrying capacity of the particles. The bed is usually placed in the lower portion of the reactor. Fluidising air or gas entrains the particles with a gas flow inside the reactor. At the upper portion of the reactor, or outside the reactor, the particles are separated from the gas flow by separators.

15 In a circulating fluidised bed the particles are recirculated to the lower portion of the reactor, from where they can once again be entrained in the gas flow.

20 There are basically two types of separators: non-centrifugal mechanical particle separators and cyclone-type particle separators.

25 Examples of non-centrifugal mechanical particle separators are disclosed in WO 83/03294, US 5,025,755, US 5,082,477 and US 5,064,621.

30 In WO 83/03294 a boiler is disclosed having a non-centrifugal mechanical particle separator outside the reactor.

In US 5,025,755 an apparatus is disclosed having a non-mechanical particle separator in the upper portion of the reactor.

An example of a cyclone-type particle separator
5 disposed in the upper portion of a reactor is disclosed in US 5,070,822.

Summary of the Invention

10 An object of the present invention is to achieve a compact particle separator.

Another object of the invention is to achieve a particle separator that is easily mountable and demountable inside a reactor.

15 These and other objects which will become apparent in the following are achieved by a fluidised bed reactor system and a method for separating particles as defined in the accompanied claims.

The present invention is based on the insight of the advantages of separating particles in a direction other
20 than the "main flow direction". The term "main flow direction" is generally referred to here as the direction of a line drawn between a point before the gas enters the separator and a point after the gas exits the separator. In prior art non-centrifugal mechanical separators, the
25 separator elements are conventionally positioned so as to separate the particles from the gas flowing substantially in the "main flow direction". In other words, the separation direction is one-dimensional. According to the present invention, however, the particles can be
30 separated from the gas flowing in a direction other than the "main flow direction", whereby the separation is multidimensional.

Also, it has been realised that the particle separator can be made compact in a configuration that
35 allows the gas to pass from the outside of the configuration to the inside thereof and/or vice versa,

wherein the particles are separated from the gas during such a travel.

According to one aspect of the present invention a method is provided for separating entrained particles
5 from a gas in a fluidised bed reactor system, comprising the steps of:

- in a cylindrical r -, ϕ -, z -coordinate system leading the gas in the z -direction (axial direction),
- diverting the gas to flow substantially in the
10 r -direction (radial direction), while keeping the gas circumferentially distributed in the ϕ -direction (angular direction), and
- mechanically separating the particles from the gas while the gas is flowing substantially in the
15 r -direction.

According to another aspect the present invention provides a fluidised bed reactor system including a particle separator for separating entrained particles from a gas having a flow path. The particle separator
20 comprises a set of non-centrifugal mechanical separator elements disposed in the flow path of the gas, so that the gas is able to pass between the separator elements while the inertia of the particles directs them to the separator elements upon which they impinge and are
25 separated and removed from the gas flow. The set of separator elements is arranged in a configuration having a centre zone with a centre axis, and a circumference. Directional means are provided for directing the gas so that gas passing through the set of separator elements
30 flows from the circumference to the centre zone of the configuration and/or vice versa.

Thus, as mentioned above, according to the present invention the particles are separated from the gas multidimensionally instead of the traditional one-
35 dimensional separator passage as far as non-centrifugal mechanical particle separator elements are concerned. In mathematical terms, instead of a separation in the x -

direction in an orthonormal x, y, z coordinate system,
the present invention provides separation in the r -
direction in a cylindrical r, ϕ, z -coordinate system,
where:

5

$$r = x \cdot \cos \phi + y \cdot \sin \phi$$

According to a further aspect the separator elements
are arranged as a structure having consecutive particle
10 separation levels X_N ($X_1, X_2, X_3, \dots, X_N$), N being an
integer. The directional means are arranged at the
circumference and at the centre zone of the
configuration, so as to cause the gas to flow through the
separator elements in one direction on levels with odd-
15 numbered N and in the reversed direction on levels with
even-numbered N .

The obvious advantage of this is that, when the
separator elements preferably being provided as one set
of separator elements, one and the same separator element
20 is passed by the flowing gas repeated times. Thus
particles that have not impinged upon the separator at
the first pass, can be captured on the following
pass(es), thus making the most of each separator element.

Aptly, the configuration has a generally cylindrical
25 shape, preferably with the separator elements being
arranged essentially symmetrically. Note that the term
"cylindrical" does not necessarily imply that the
cross-section is circular.

Preferably, the separator elements have an elongated
30 shape and extend essentially in parallel with the centre
axis.

It is advantageous to use channel-shaped beams as
separator elements, the beams having an essentially
U-shaped cross-section. The beams are arranged so that
35 the particles impinge upon the bottom of the U and then
fall down, guided by the channel-shaped beam, to be
collected.

In order to further enhance the efficiency of the system, the set of separator elements can form a number of ring-shaped arrays being placed within each other. The separator elements of an array are preferably
5 circumferentially displaced with respect to the separator elements of an adjacent array.

Consequently, the separator elements of the different arrays can be arranged in a staggered way with an angular offset with respect to each other. Those
10 particles that do not impinge on separator elements of one array can be disentrained from the gas to a great extent by the separator elements of an adjacent array. Of course the number of arrays is chosen according to what is considered appropriate, with respect to compactness,
15 efficiency etc.

According to a specific embodiment, each separator element, being in form of a U-shaped beam, is provided with a respective additional U-shaped beam attached in parallel thereto. Moreover, each of the additional
20 U-shaped beams is provided with a respective further U-shaped beam attached in parallel thereto, forming a unit with three U-shaped beam channels. Dividing plates are inserted in at least two U-shaped beam channels for mechanical segregation of said channels and a section of
25 at least one of the elements in the unit is removed, so as to create three particle separation levels of impinge areas, one for each element in the unit. Directional means are arranged to direct the gas in alternating level directions.

30 A three-channel unit design can be constructed with three identical U-beams or with three non-identical U-beams. For instance, a tapered design may be used. This is particularly practical inside a circular reactor shaft, in which case the element located nearest the
35 shaft centre would have a smaller cross-section than the intermediate element, which in turn would have a smaller

cross-section than the element furthest away from the centre.

Due to the configuration of a particle separator according to the invention, it is particularly suitable
 5 for disposal inside a reactor shaft. Even though the separator elements are preferably arranged in a symmetrical and circular configuration, it is also possible to arrange the separator elements in other configurations, such as triangular, square, other polygon
 10 or in any other desired way. When the particle separator is intended to be used inside a reactor shaft, it is favourable to have the configuration adapted to the cross-section of the reactor shaft.

After the particles have been disentrained they fall
 15 down from the separator elements to some form of collector located below. The disentrained particles can advantageously be recycled to the reactor bed by a standpipe.

When the particle separator is disposed inside the reactor, an internal standpipe located around the centre
 20 axis of the reactor can be used. In this case, the fluidising gas with entrained particles suitably flows from the bottom portion to the top portion of the reactor, generally symmetrically around the internal
 25 standpipe. The particle separator, preferably being disposed at the top portion of the reactor, disentrains the particles from the gas, which exits the reactor. The particles are then recycled through the internal standpipe in the centre of the reactor.

30 Of course it is also possible to let an internal standpipe be positioned off-centred, e.g. extending along the wall of the reactor. In this case it might be desirable to have more than one standpipe. The choice of an off-centred alternative provides for the possibility
 35 of letting the gas enter the particle separator from the centre of the configuration and consequently the

disentrained particle can advantageously be caused to fall down at the circumference thereof.

The above description is related to a circulating fluidised bed. The person skilled in the art will realise that the present invention can be utilised in other connections as well. The skilled person will also realise that the particle separator of the present system can be located outside a reactor, and not only inside.

10 Brief description of the drawings

The invention will be more closely described in the following in relation to non-limiting embodiments thereof with reference to the drawings, in which:

Figure 1 illustrates schematically a cross-section of a fluidised bed reactor system according to the present invention.

Figure 2 illustrates an example of a cross-section through the particle separator in the top portion of the reactor in Figure 1.

20 Figures 3a-3b illustrate different particle separator arrangements.

Figures 4a-4c illustrate different types of separator element units consisting of three integrated U-shaped beams.

25 Figures 5a-5c illustrate the three U-shaped beams of Figure 4c individually.

Figure 6 illustrates the flow path through the beams of Figures 5a-5c, when they have been attached to each other.

30 Detailed description of preferred embodiments of the invention

Figure 1 illustrates schematically a cross-section of a circulating fluidised bed reactor system 1, comprising a particle separator 4, according to the present invention. The system 1 has an elongated reactor 6, in which a particle bed is disposed in the lower

portion of the reactor 6 on a distributor plate 8. Below the bed is an inlet 10 for primary gas, and above are two inlets 12 for secondary gas. The reactor 6 has an enlarged cylindrical top portion, the outer wall 13 of which has a larger diameter than the rest of the reactor 6. A particle separator 4 having elongated U-shaped beams 14 as separator elements, constituting a cylindrical configuration, is housed in said top portion. In use, the flow path of the gas is as follows. Primary gas enters the reactor 6 through the inlet 10 for primary gas, is distributed by distributor plate 8, entrains particles from the particle bed, travels vertically up the reactor 6, mixes with secondary gas entering from the inlets 12 for secondary gas, reaches the particle separator 4 where the only path available for the gas is horizontally through the particle separator 4, thus passes the U-shaped beams 14 and finally exits vertically through a gas outlet 16.

However, the majority of the particles entrained in the gas flow are separated therefrom by the elongated U-shaped beams 14. The particles fall into a funnel-shaped particle collector 18 and are returned to the bottom portion of the reactor 6 through an internal standpipe 20, so that they can be entrained in the gas flow again. The standpipe 20 extends in the centre of the reactor 6 from the bottom of the particle collector 18 to a level between the inlets 12 for secondary gas and the distributor plate 8.

The gas and any particles by-passing the U-shaped beams 14 then pass to a conventional cyclone 100. Material disentrained by the cyclone 100 fall into an external standpipe 102 and are recycled through a line 104 running from a port 106 just above the base of the external standpipe 102 to a port 108 on the reactor 6 between the distributor plate 8 and the inlets 12 for secondary gas. Recirculation is initiated by fluidisation of the external standpipe 102 via a distributor plate 110

at the base. Gas from the cyclone 100 passes to an exhaust stack 112.

Figure 2 illustrates an example of a cross-section through the particle separator 4 in the top portion of the reactor 6 in Figure 1. As can be seen, two rings 22, 24 of U-shaped beams 14 are arranged concentrically, within the outer wall 13 of the top portion. The small arrows indicate the direction of the gas as it enters the configuration. Even though the figure illustrates a radial gas flow from the outside to the inside of the configuration, the skilled person appreciates that the reverse direction would also be practicable, in which case the U-shaped beams 14 would suitably be turned around with the opening of the U facing inwards. In the figure the beams of the inner ring 24 are displaced in the circumferential direction of the reactor with respect to the beams of the outer ring 22. With this arrangement the beams of the inner ring 24 effectively shield the gas that by-passes the beams of the outer ring 22.

Figure 3a illustrates a configuration having a stacked multileveled gas flow. The top of each beam 14 is mounted to a suspension attachment 15 so that the beams 14 are vertically suspended. The beams 14 can be freely suspended so as to allow them to expand in their longitudinal direction as the temperature rises. The illustrated configuration of beams can be said to comprise three main levels or sections: a lower section A, a middle section B and an upper section C. The beams 14 are supported by horizontal support plates 26a-c (three shown) connected by support bars (not shown) to hold the support plates 26a-c in correct vertical alignment. The support plates 26a-c define the top of each section A-C. A cover plate 28 disposed in the centre of the configuration is mounted on top of the middle support plate 26b. The support plates 26a-c and the cover plate 28 forces the gas to flow in alternating level directions, as indicated by the solid arrows in the

figure. Thus, when the gas vertically enters the configuration at the lower section A, the support plate 26A redirects it into the horizontal direction to a radial inwardly flow. Next the gas passes up to the middle section B, where it is forced by the cover plate 28 to once again flow horizontally, this time in a radial outwardly flow. Thereafter, having reached the upper section C, the gas is forced to flow inwardly by the support plate 26c. Finally, the gas vertically exits the configuration from the centre thereof. Naturally, support plate 26c could be removed without substantially altering the flow path of the gas. Furthermore, although not shown in the figure, the support plate positioning can be made variable and, thus, so can the beam height, making it possible to utilise a larger or smaller part of the beams according to preference. The non-solid arrows represent particles separated from the gas flow falling from the bottom of the U in the beams into the funnel-shaped collector 18 and then passing to the internal standpipe 20. Thus, the particles will impinge on the inside bottom of the U in the beams at sections A and C, if the beams are oriented as in figure 2. Of course it would also be possible to turn them in the reverse orientation, or to arrange the beam rings with different orientations, one beam ring with the opening of the U facing the centre and the other beam ring with the opening of the U facing the circumference.

In Figure 3b the cover plate 28 in Figure 3a has been removed and a pipe 34 has been inserted extending from the lower support plate 26a to the gas outlet 16. Thus, the gas flows past the U-shaped beams 14 only once. This arrangement gives a shorter residence time through the particle separator, which at times might be preferred. Depending on stability requirements, the alternative would be to remove the support plates 26a-c in order to take advantage of the full length of the beams 14, as shown in figure 1, or only to change the

positioning of the support plate 26a-c in order to obtain a desired length.

Figures 4a-4c illustrate different types of separator element units consisting of three integrated U-shaped beams. Similarly to the embodiment shown in Figure 3a, these triple-units are adapted to provide for a multileveled flow. However, to make this possible a section of one of the beams must be removed and separating plates be inserted, as will be explained in connection with Figures 5a-5c and Figure 6.

Three different constructions are shown in Figures 4a-4c. As has been discussed above a tapered construction (Figure 4a) may be desired, e.g. inside a circular reactor shaft, in which case the beam 40 located nearest the shaft centre has a smaller cross-section than the intermediate beam 42, which in turn has a smaller cross-section than the beam 44 furthest away from the centre.

If a tapered design is not considered necessary, the constructions illustrated in Figures 4b and 4c may be used. The construction of Figure 4c requires the lowest number of separating plates, and this is the embodiment shown in Figures 5a-5c and Figure 6. Note that in reality the three beams 50, 52 and 54 are attached to each other, e.g. by spot welding, however, in Figure 4c they are shown somewhat separated for sake of clarity.

Figures 5a-5c illustrate the three U-shaped beams of Figure 4c individually. The beams each have a lower section A, a middle section B and an upper section C, from which three particle separation levels will be achieved.

In Figure 5a the first beam 50 is illustrated. At the upper section 50C of the beam 50, the bottom of the U has been removed. At the middle section 50B of the beam 50 two separating plates 60, 62 are inserted perpendicularly to the bottom of the U, and a plate 64 parallel thereto covering the area between the perpendicularly inserted separating plates 60, 62. Thus,

a box has been provided over the middle section 50B mechanically separating the three sections 50A-C from each other.

In Figure 5b the second beam 52 is illustrated. As
5 can be seen it is a standard U-shaped beam with no modifications.

In Figure 5c the third beam 54 is illustrated. A separating plate 66 is inserted perpendicularly to the bottom of the U, at the transition between the upper
10 section 54C and the middle section 54B of the beam 54. A plate 68 extending upwards from the separating plate 66 covers the upper section 54C of the beam 54. Thus the upper section 54C is mechanically separated from the middle section 54B and the lower section 54A. A plate 70
15 arranged parallel to the bottom of the U is covering the lower section 54A of the beam 54.

Figure 6 illustrates the gas flow path (solid arrows) through the beams 50, 52, 54 of Figures 5a-5c, when they have been attached to each other, and the
20 respective parts have been depicted with the same reference numerals. The gas directed by a support plate 72 and separating plate 62 enters the configuration at the lower section 50A of the first beam 50. While the particles can impinge on the bottom of the U of the first
25 beam 50, the gas passes all three beams (between two adjacent triple-units). Next, the gas flows upwards but is hindered by a cover plate 74, which corresponds to the cover plate 28 in Figure 3a, forcing in co-operation with separating plate 66 the gas to flow back past the three
30 beams. However, remaining particles can impinge on the bottom of the U of the third beam 54, at the middle section 54B thereof. Note that the gas can only enter the third beam 54 at its middle section 54B because of the plate 70 covering the lower section. Thereafter, the gas
35 is caused to double-back again by a support plate 76, and enters the first beam 50 at the upper section 50c thereof. The plate 64 refuses entrance of the gas at the

middle section of the first beam 50. Since the bottom of the U is removed at section 50c and the separating plate 60 is provided for mechanical isolation of the upper section from the other sections, the gas will pass
5 through the first beam 50 to the second beam 52. This time remaining particles can impinge on the bottom of the U of the second beam 52, at the upper section 52C thereof. Finally, having no other way to flow (because of plate 68 and cover plate 74) the gas exits through the
10 gas outlet 16.

This triple-unit beam design is preferably arranged in a circular configuration as the beams in fig. 2. Thus, although not shown, to the left of the triple-unit is the outer wall of the top portion of the reactor, and to the
15 right is the centre of the reactor (compare with the left half of fig. 3).

It is to be noted that numerous modifications and variations can be made without departing from the scope of the present invention defined in the accompanied
20 claims.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

CLAIMS

1. Method for separating entrained particles from a
 5 gas in a fluidised bed reactor system, comprising the
 steps of:
 - in a cylindrical r -, ϕ -, z -coordinate system leading the
 gas in the z -direction (axial direction),
 - diverting the gas to flow substantially in the
 10 r -direction (radial direction), while keeping the gas
 circumferentially distributed in the ϕ -direction (angular
 direction), and
 - mechanically separating the particles from the gas
 while the gas is flowing substantially in the
 15 r -direction.

2. Method according to claim 1, comprising the
 further steps of:
 - causing the gas having flown in said r -direction to
 20 flow in the reversed r -direction,
 - mechanically separating the particles from the gas
 while the gas is flowing in the reversed r -direction, and
 - optionally, further reversing the direction of gas flow
 and mechanically separating the particles from the gas as
 25 above.

3. Method according to claim 1 or 2, wherein in said
 cylindrical coordinate system (r, ϕ, z) the gas is
 initially directed from a larger r -value towards a
 30 smaller r -value, for the first separation step, and
 wherein after all separation steps have been performed
 the gas, having been directed towards a smaller r -value
 in the last separation step, is led away in the z -
 direction.

4. Method for separating entrained particles from a gas in a fluidised bed reactor system, comprising the steps of:

- causing the gas to flow in a stacked multileveled flow with consecutive particle separation levels X_N ($X_1, X_2, X_3, \dots, X_N$), N being an integer,
- directing the gas to flow in a first direction on the first level X_1 ,
- bringing the gas to the next level X_2 from said first level X_1 ,
- directing the gas to flow in a direction reversed to said first direction on said next level X_2 , so as to create a doubled-back flow path,
- optionally, bringing the gas to additional particle separation levels, so as to cause the gas to flow in the first direction on levels with odd-numbered N and in the reversed direction on levels with even-numbered N , and
- mechanically separating the particles from the gas on each level.

5. Method according to claim 4, in which the gas is caused to flow from a centre zone to a circumference of said centre zone or vice versa, whereby said directions are essentially radial directions in respect of the centre zone and the circumference associated thereto.

6. Fluidised bed reactor system including a particle separator for separating entrained particles from a gas having a flow path, comprising a set of non-centrifugal mechanical separator elements disposed in the flow path of the gas, so that the gas is able to pass between the separator elements while the inertia of the particles directs them to the separator elements upon which they impinge and are separated and removed from the gas flow, characterised in that the set of separator elements is arranged in a configuration having a centre

zone with a centre axis, and a circumference, wherein directional means are provided for directing the gas so that gas passing through the set of separator elements flows from the circumference to the centre zone of the configuration or vice versa.

7. System according to claim 6, in which said set of separator elements is arranged as a structure having consecutive particle separation levels

10 $X_N (X_1, X_2, X_3, \dots, X_N)$, N being an integer, wherein said directional means are arranged at the circumference and at the centre zone of the configuration, so as to cause the gas to flow through the set of separator elements in one direction on levels with odd-numbered N and in the

15 reversed direction on levels with even-numbered N.

8. Fluidised bed reactor system including a particle separator for separating entrained particles from a gas having a flow path, comprising a set of non-centrifugal

20 mechanical separator elements disposed in the flow path of the gas, so that the gas is able to pass between the separator elements while the inertia of the particles directs them to the separator elements upon which they impinge and are separated and removed from the gas flow,

25 characterised in that said set of separator elements is arranged as a structure having consecutive particle separation levels $X_N (X_1, X_2, X_3, \dots, X_N)$, N being an integer, wherein directional means are arranged to cause the gas to flow through the various levels of the

30 structure in one direction on levels with odd-numbered N and in the reversed direction on levels with even-numbered N.

9. System according to claim 8, in which said set of

35 separator elements is arranged in a configuration having a centre zone with a centre axis, and a circumference, wherein said directional means are located at the

circumference and at the centre zone of the configuration, so as to cause the gas to pass through the set of separator elements from the circumference to the centre zone of the configuration or vice versa.

5

10. System according to any one of claims 6, 7 or 9, wherein said configuration has a generally cylindrical shape, preferably with the separator elements being arranged essentially symmetrically.

10

11. System according to any one of claims 6-10, wherein the separator elements have an elongated shape and extend essentially in parallel with the centre axis.

15

12. System according to any one of claims 6-11, wherein said separator elements are channel-shaped beams having an essentially U-shaped cross-section, wherein the beams are arranged so that the particles impinge upon the bottom of the U and then fall down, guided by the channel-shaped beam, to be collected.

20

13. System according to any one of claims 6-12, in which said set of separator elements forms a number of ring-shaped arrays being placed within each other.

25

14. System according to claim 13, in which the separator elements of an array are circumferentially displaced with respect to the separator elements of an adjacent array.

30

15. System according to claim 12, or any one of claims 13-14 when dependent of claim 12, in which each U-shaped beam is provided with a respective additional U-shaped beam attached in parallel thereto, each of the additional U-shaped beams being provided with a respective further U-shaped beam separator element attached in parallel thereto, forming a unit with three

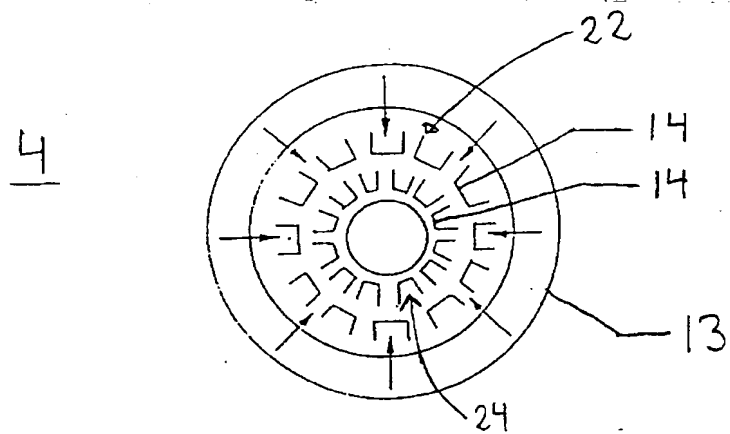
35

U-shaped beam channels, dividing plates being inserted in at least two U-shaped beam channels for mechanical segregation of said channels and a section of at least one of the elements in the unit being removed, so as to
5 create three particle separation levels of impinge areas, one for each element in the unit, wherein said directional means are arranged to direct the gas in alternating level directions.

10 16. System according to any one of claims 6-15, wherein the particle separator is located inside a reactor, preferably at the upper portion thereof, and wherein said centre axis is in parallel with the axis of the reactor, preferably co-axially.

15 17. System according to any one of claims 6-16, wherein said configuration is circular cylindrical.

18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885

Fig. 2

3/8

PRU 9-07-15

Fig. 3a

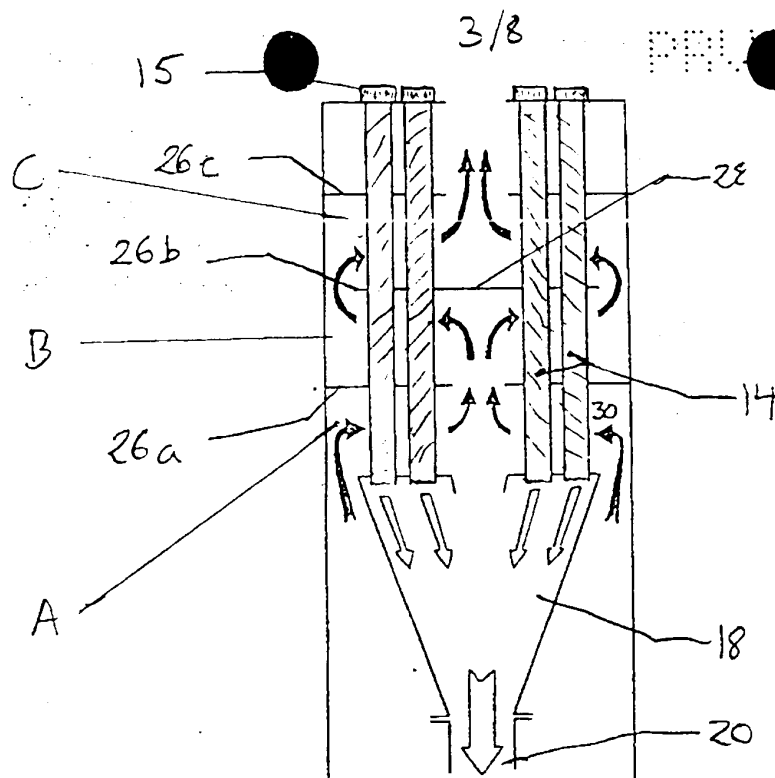
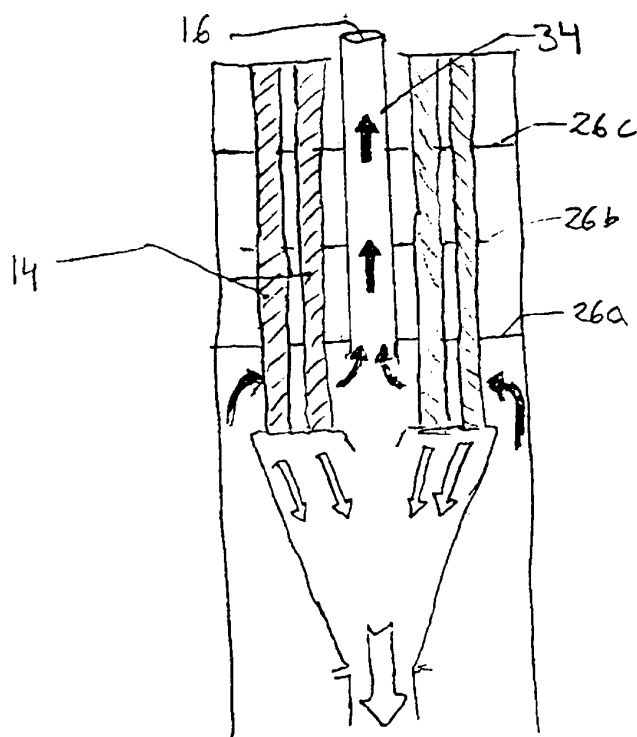


Fig. 3b



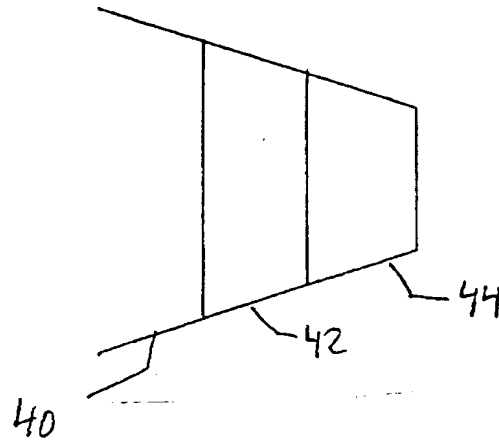
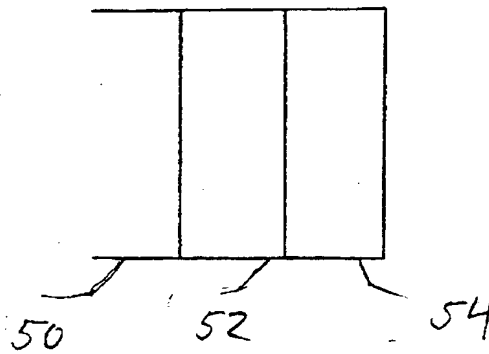
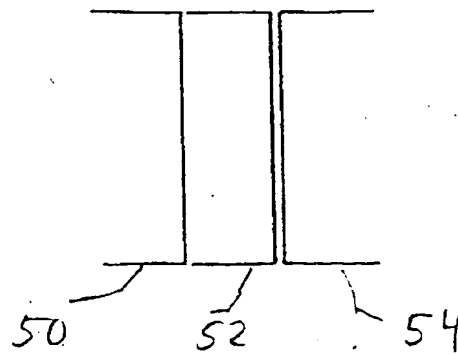
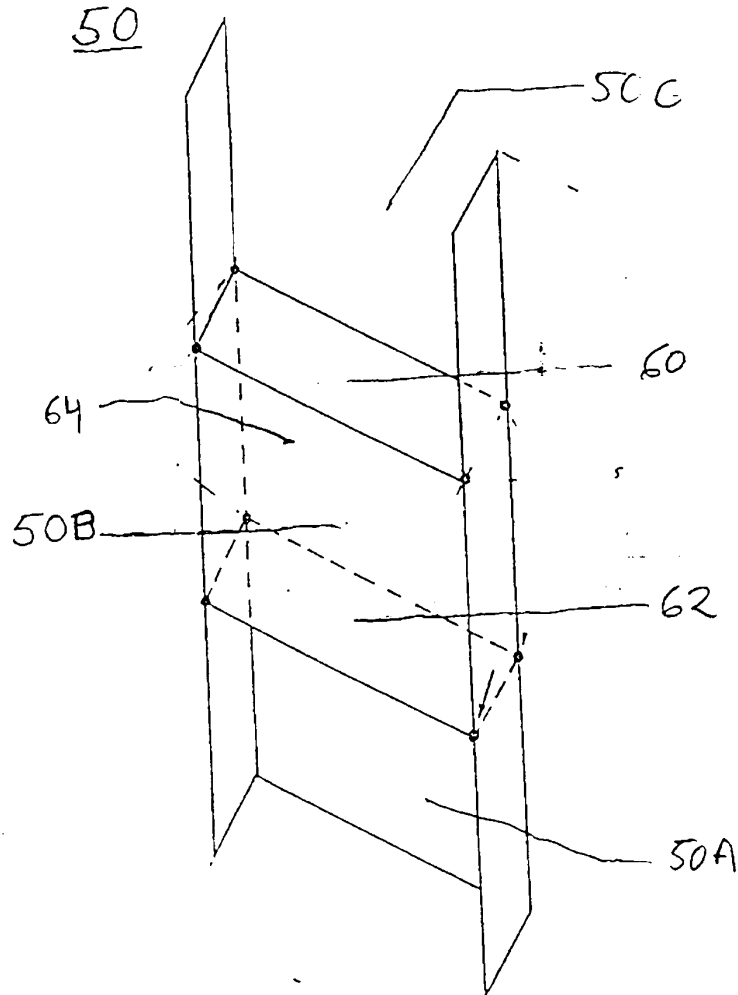
Fig. 4aFig. 4bFig. 4c

Fig. 5a



C

B

A

9-07-15

Fig. 5b

52

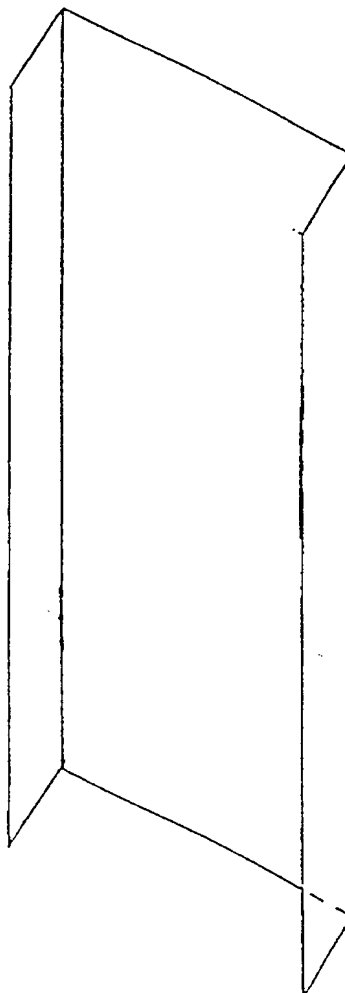


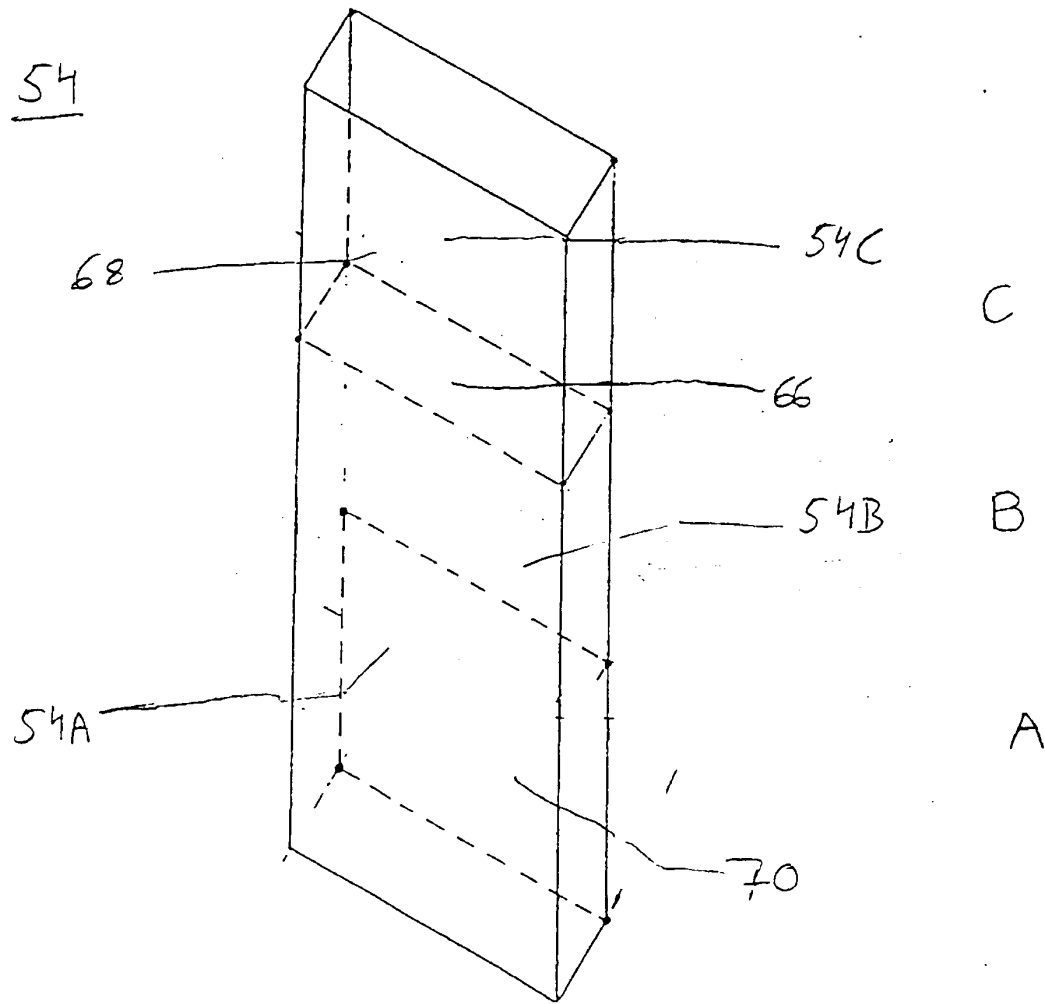
Fig. 5c

Fig. 6

